

P4100 Fuel Gas Control Valve

The BelGAS^{CP} P4100 series is a pneumatically operated control valve, designed to withstand severely corrosive mediums associated with the oil and gas industry.

Applications

- Low Pressure Separators
- Throttling Gas or Liquid Service
- Heater-Treater Applications

Features

 Simple Maintenance: The valve trim can be quickly changed without removing the valve from the line.
Simply loosen the bolts to lift the bonnet and housing free of the body.



Specifications


| Inlet Pressure Rating | 300 PSIG (Max) | | | |
|--------------------------------|------------------------------|--|--|--|
| Operating Pressure | 30-35 PSIG | | | |
| Temperature Range | -20° to 200°F (-29° to 93°C) | | | |
| Air Pressure to Signal (Pilot) | 0-30 PSIG Recommended | | | |

Materials of Construction


| Part | Material | |
|----------------|-------------------|--|
| Body | Cast Ductile Iron | |
| Diaphragm | Nitrile | |
| Housing | Cast Ductile Iron | |
| Main Spring | Stainless Steel | |
| Seat | Polyurethane | |
| Stem | Stainless Steel | |
| Trim / Orifice | Stainless Steel | |


Dimensional Data (in.)

| I | Valve | A | | В | | |) | D | | Approx. |
|---|-----------------|------|-----|------|----|------|------|------|----|------------------------|
| | Size | in. | mm | in. | mm | in. | mm | in. | mm | Weight |
| | 1" NPT Ports | 4.38 | 111 | 3.25 | 83 | 3.27 | 83.5 | 1.13 | 29 | 5.00 lbs. (2.27 kg) |

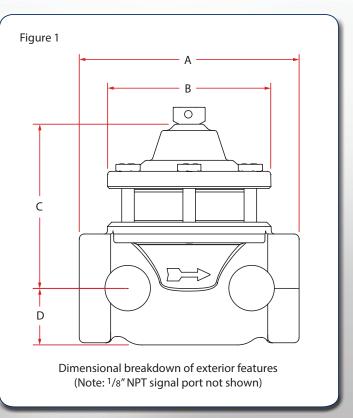

P4100 Parts List & Repair Kits

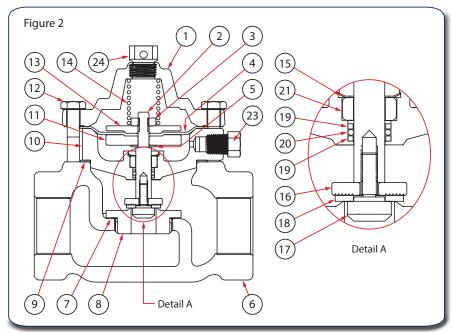



| ltem | Description | Qty. | Part Number |
|------|---|------|--------------|
| 1 | Bonnet | 1 | 604-272-000 |
| 2 | Stem | 1 | 689-019-000 |
| 3 | Nut | 1 | 634-477-000 |
| 4 | Diaphragm | 1 | 600-518-000 |
| 5 | Stem Gasket | 1 | 624-105-000 |
| 6 | Body | 1 | 664-440-002 |
| 7 | Orifice Gasket | 1 | 624-104-000 |
| 8 | Orifice | 1 | 688-069-000K |
| 9 | Housing Gasket | 1 | 624-103-000 |
| 10 | Housing | 1 | 629-257-000 |
| 11 | Lower Plate | 1 | 638-088-000 |
| 12 | Screws | 6 | 603-011-001 |
| 13 | Upper Plate | 1 | 637-339-000 |
| 14 | Spring | 1 | 655-785-000 |
| 15 | Retaining Ring | 1 | 644-057-000 |
| 16 | Disc | 1 | 619-071-000 |
| 17 | Ratio Plug | 1 | 643-225-000 |
| 18 | Seat | 1 | 650-195-000 |
| 19 | Back-up Ring | 2 | 649-340-000 |
| 20 | 0-ring | 1 | 649-000-004 |
| 21 | Bushing | 1 | 608-087-000 |
| 23 | Plug | 1 | 673-028-000 |
| 24 | Breather Plug | 1 | 639-144-000 |
| 25 | Plug, ¹ /4" NPT | 2 | 639-099-000 |
| 26 | 1" NPT Cap Plug (Not Shown) | 2 | 610-060-001 |
| 27 | ¹ /8" NPT Cap Plug (Not Shown) | 1 | 639-000-003 |

P4100 Part Number Matrix

| P41 | 00 | 08 | 0 | 0 | 0 | K | 0 | 0 | V | 8 |
|-----------------------|-------|--------|-------|-------|------|------|---|---|---|---|
| Body Size | | | | | | | | | | |
| 1" NPT | | 08 | | | | | | | | |
| Body Materia | i . | | | | | | | | | |
| Ductile Iron | | | | 0 | | | | | | |
| Signal Port Or | ienta | tion | | | | | | | | |
| 11 o'clock (Standard) | | | | | | K | | | | |
| Configuration | (Pres | sure I | Vonit | oring | Body | Tap) | | | | |
| Both Supply a | nd Ou | tput | | | | | | | V | |
| Trim Size (Orifice) | | | | | | | | | | |
| 0.5" | | | | | | | 8 | | | |

| Repair Kits | | | | | | | |
|------------------------------|------|-------------|--|--|--|--|--|
| Description | Qty. | Part Number | | | | | |
| General Repair Kit | | 971-P41-000 | | | | | |
| Housing O-ring/Bushing Kit | 1 | 971-P41-001 | | | | | |
| Housing/Stem Replacement Kit | | 971-P41-002 | | | | | |

Contact your BelGASCP representative or go to www.BelGASCP.com to learn more about our products.



Trusted. Proven. Better.

8019 Ohio River Blvd. Newell, WV 26050 Toll Free: 800-727-5646 sales@belgas.net www.BelGASCP.com 2221 SE 69th Street Oklahoma City, OK 73149 Toll Free: 800-833-3127